


Assembly is better suited to 2 person construction. You will need a 10mm spanner or socket

**THE ASSEMBLY SHOWN IS FOR A DOUBLE SIDED BENCH. THE PRINCIPLE SHOWN WILL BE THE SAME FOR OTHER STYLES**

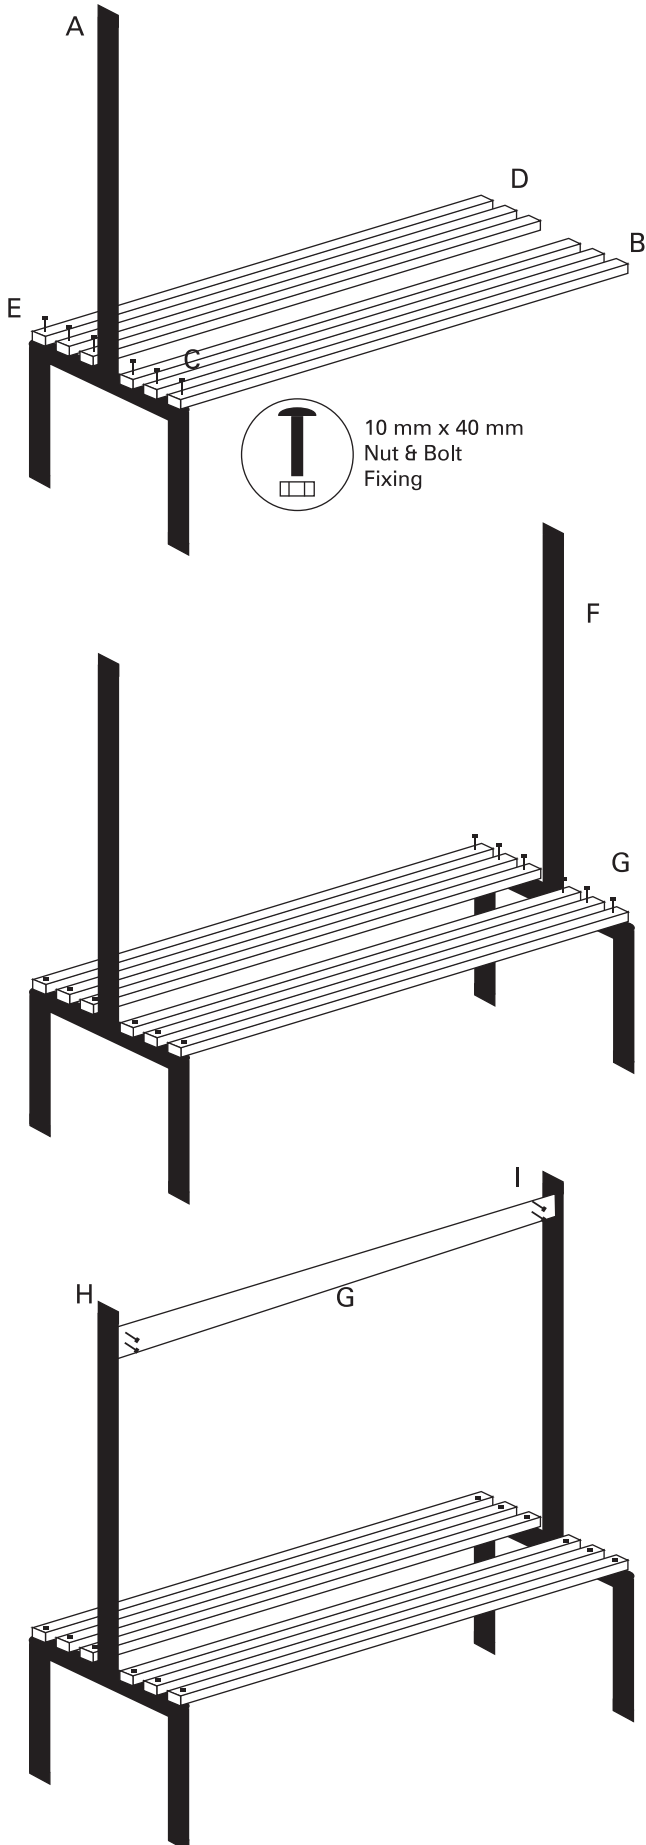

Take upright side frame ("A") and hold in an upright position.

One at a time, position the 3 bench slats ("B") onto the side frame and locate the 3 bolts supplied and finger tighten ("C").

Repeat the process with bench slats ("D") in insert the 3 nuts and bolts supplied and finger tighten ("E").

The end of the slats at ("B") and ("D") can either be rested on the floor or supported otherwise.

Position side frame ("F") and insert the 6 bolts provided at ("G") and finger tighten.

All bolts are 40mm long to suit hook strip and fixing slats to seat frames apart from single benches with no upright rails for hooks which have one per end in the middle which is 70mm long and goes through the timber slat and square tube.



Position the Coat Hanging rail "G" and insert and finger tighten the 4 bolts provided ("H") and ("I").

Your seating bench is now ready its final fixing. Make sure all the parts are located correctly and tighten all the bolts.

Before final positioning ensure all fixings are secure.